


Nakano et al.
U.S.S.N. 10/527,352
Page 2 of 14

RECEIVED
CENTRAL FAX CENTER
SEP 28 2007

Amendments to the specification:

Please amend the abstract as follows:

A polycarbonate-based resin composition for extrusion molding using a sizing die, and a molded product produced by extrusion-molding the resin composition using a sizing die. The polycarbonate-based resin composition comprises, as a main component, a polycarbonate having a viscosity-average molecular weight of 17000 to 27000 and containing main repeating units represented by the following formula (A):

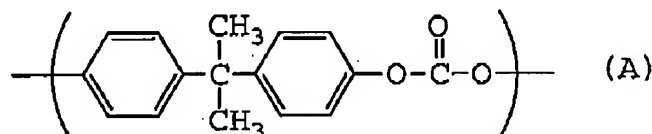

wherein an amount of proton (Pa) and an amount of proton (Pb) per 1 g of the polycarbonate which are calculated from respective integral values of a signal (a) detected at $\delta = 7.96$ to 8.02 ppm and a signal (b) detected at $\delta = 8.11$ to 8.17 ppm in $^1\text{H-NMR}$ spectra thereof as measured in a deuterated chloroform solvent, satisfy the following formula (1):

$$4 < \{(Pa) + (Pb)\} < 26 \quad (1)$$

wherein a unit of each of (Pa) and (Pb) is $\mu\text{mol/g}$; ~~as well as a molded product produced by extrusion-molding the resin composition using a sizing die.~~ The above polycarbonate resin composition exhibits good mechanical properties and a good moldability, ~~and is suitable for extrusion molding using a sizing die.~~